




TECHNICAL DATA SHEET

PEDESTAL STAR.T

SELF-EXTINGUISHING UL94 V0

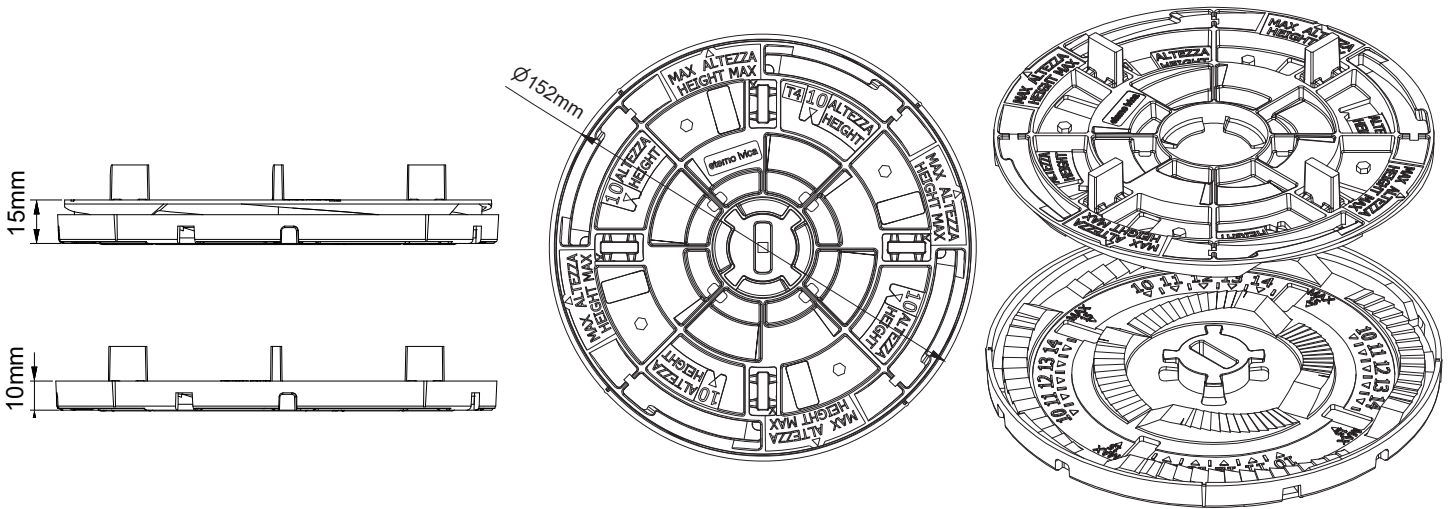

TECHNICAL SPECIFICATION

Supply and installation of supports for raised floors "STAR.T SELF-EXTINGUISHING UL94 V0".

The supports are composed of two polypropylene UL94 V0 elements with a diameter of 152mm and with an adjustable height from 10mm to 15mm, in the upper part there are N°4 spacer wings h 12mm with a thickness of 2-3-4mm.

In the base there are holes for the outflow of water. There are housings for various accessories and a hole for the adjustment key.

By using the special STAR.T UL94 V0 extension, it is possible to reach a maximum height of 30mm.

CHARACTERISTICS:

- Self-extinguishing UL94 V0
- Minimum height 8mm with only upper body used
- Minimum height with also using the base 10mm
- Height adjustable up to 15mm
- Prepared for use with extensions UL94 V0 having a height of 5mm
- Holes for water drainage
- Hole for inserting adjustment wrench
- N°4 spacer flaps height 12mm thickness 2-3-4mm
- fracturable and removable

RAW MATERIAL:

Polypropylene UL94 V0

ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

APPLICATIONS SURFACES:

- On any waterproofing membrane
- On any insulating hard panel
- On any compact and solid surface

APPLICATIONS AREA:

Can be used with any prefabricated self supporting element for outdoor flooring, with a minimum thickness of 15mm

GENERAL CHARACTERISTICS & PROPERTIES

	UNIT	VALUE	TOLERANCE +/-
BASE DIAMETER	mm	152	+/- 1.0
BASE THICKNESS	mm	2	+/- 0.2
SURFACE OF THE BASE	cmq	182	+/- 5
TABS THICKNESS	mm	2-3-4	+/- 0.2
TABS HEIGHT	mm	12	+/- 0.2
SHORE	Shore d	70	+/- 3
RAW MATERIAL EXTINGUISHING CLASS PP: UL94 V0	mm	1.6	
RAW MATERIAL EXTINGUISHING CLASS TPE: UL94 V0	mm	2.3	



TECHNICAL DATA SHEET

PEDESTAL STAR.T

SELF-EXTINGUISHING UL94 V0

ITEMS CHARACTERISTICS & PROPERTIES

STAR.T_E003010015.V0	UNIT	VALUE	TOLERANCE
min HEIGHT	mm	10	+/- 1,0
MAX HEIGHT	mm	15	+/- 1,0
WEIGHT	kg	0.091	+/- 5 %
MAX CENTRAL COMPRESSION LOADING RESISTANCE*	kN	35.53	/

The code refers to the model with 4 mm thick fins, 2 and 3 mm fins available on request

*Tests made by Civil and Environmental Department of University of Padova. 1 kN = 98,6 kg

PACK/STORAGE	
PIECES PER KIT	20
PIECES PER BOX	100
BOXES PER PALLET	54
BOX DIMENSION	40x40x24cm
BOX WEIGHT	9.4kg
PALLET	80x120cm
PCS PER PALLET	5400

The packaging of the supports consists of cardboard boxes. The final packaging of the pallets is made with the wrapping of a polyethylene film. Indoor storage, protected from precipitation, is recommended.

INSTALLATION METHOD

The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.